


SENCO CN CON. HDG DP SM PLAIN 3,1X32MM CARBON STEEL STANDARD TENSILE

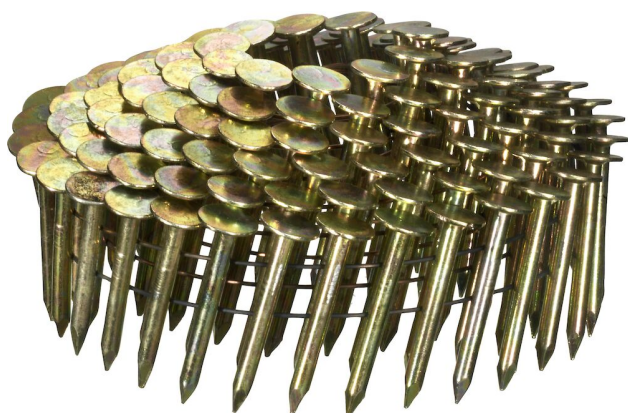

HJ15ASAVR

APPLICATIONS

Asphalt shingles, fiber glass shingles, siding, vapor barriers


TECHNICAL SPECIFICATIONS

Collation angle	16 °
Wounding type	Conical
Collation type	Wire collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Plain
Nail head type	Full round head
Nail shank type	Smooth shank
Point type	Diamond
Pointangle	40 °
First welding wire distance	14.2 - 15.5 mm
Second welding wire distance	33.5 - 34 mm
Nail length	32 mm
Nail diameter	3.1 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274054896
Package quantity	1800 pieces
Net weight	4.55 kg

FASTENER SPECIFICATIONS



CE SPECIFICATIONS

Dit veld moet nog verwijderd worden EN 14592:2008+A1:2012

CE fastener type Round cross-section plain shank nail

Protection level in micron 30

Service class 3

Coating type Coating type 3

Coating length 22.5 mm

Head cross sectional area 72 mm

Characteristic yield moment 3000 Nmm

Dit veld moet nog verwijderd worden 3.9 N/mm²

Characteristic head pull through parameter 25.5 N/mm²

Characteristic tensile strength 620 N/mm²