


WOOD TO WOOD SCREW 4,2X50MM CARBON STEEL STANDARD TENSILE

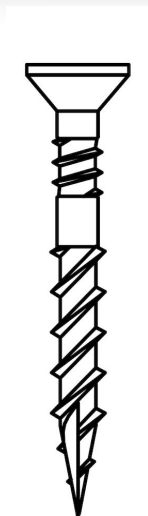

42KS50MY

APPLICATIONS

Particle boards, subfloor


TECHNICAL SPECIFICATIONS

Collation type	Plastic collated
Screw head type	Flat
Screw recess	Phillips 2
Screw thread type	Coarse
Rotations per minute	2500 RPM
Wire material	Carbon steel standard tensile
Finish	Yellow zinc
Point type	Type 17 cut point
Pointangle	23 °
Screw length	48.8 - 51.2 mm
Screw diameter	4.05 - 4.35 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274022635
Package quantity	1000 pieces
Net weight	2.3 kg

FASTENER SPECIFICATIONS



CE SPECIFICATIONS

Dit veld moet nog verwijderd worden EN 14592:2008+A1:2012

Material notification on CE label Non-alloy steel

Protection level in micron	3
Service class	1
Inner threaded diameter	3.05 mm
Threaded/profiled length	47.2 mm
Characteristic yield moment	3283 Nmm
Dit veld moet nog verwijderd worden	12.35 N/mm ²
Characteristic head pull through parameter	16 N/mm ²
Characteristic tensile strength	4729 N/mm ²
Torsional ratio	≥1,5
Characteristic torsional resistance	1.28 Nm
Characteristic torsional strength	3.4 Nm