



SCN75

The pneumatic SCN75 coilnailer runs both wire and plastic collated nials ranging from 2,5 to 3,3mm in diameter and 45 to 75mm in length. Being part of the Pro Serie, this coilnailer can span a wide range of applications from framing and siding to sub-flooring and decks.

APPLICATIONS

Framing, sheathing, siding, decking, subfloor, pallets and crates

FEATURES

- Selectable actuation switch
- Plastic or wire feed system
- Tool-free depth-of-drive


TECHNICAL SPECIFICATIONS

Pitch	8 - 8 mm	
Wounding type	Flat	
Oil free	No	
Collation type	Wire collated	
Alternative collation type	Plastic collated 16mm	
Type of nail	Coilnails	
Includes case	No	
Net weight	2.82 kg	
Firing mode	Selectable	
Magazine capacity	300 pieces	
Shots / second	3	
Air inlet size	3/8" female	
Air consumption at 60 shots/minute	168 l/m	
Operating pressure	4.8 - 8.3 bar	

IDENTIFICATION

Article number SCN75

FASTENER SPECIFICATION 715274015064

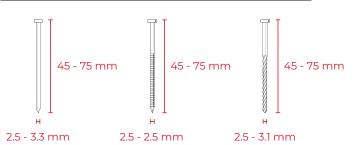





16°



MANUAL RELATED FASTENERS

NAME	FINISH	CODE
GL ring coilnail 2,87x65mm	Regular galvanised	GLxxAABF-CN
GL ring coilnail 2,87x75mm	Hot-Dipped galvanised 3	GLxxASBF-CN
BL ring coilnail 2,5x60mm	Hot-Dipped galvanised 3	BLxxASBF-CN
BJ smooth coilnail 2,5x55mm	Bright basic standard tensile	BJxxAPBF-CN
BJ smooth coilnail 2,5x50mm	Regular galvanised	BJxxAABF-CN

ACCESSORIES



NAME CODE

Lubrication oil for pneumatic tools with moisture guard PC1295



Trio lube 12, 4oz YB0123

MATCHING PRODUCTS



AC24016, low noise compressor AFN0022



AC33024UK2, Oil-less 230V UK compressor AFN0004UK2

CODE



AC32024. low noise compressor AFN0031



AC33024EU, Oil-less 230V EU compressor AFN0004EU

NAME